

T16 thermal overload relays

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	T16
Standards	UL 508, CSA 22.2 No. 14
Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"
Short-circuit protective device	See table "Full load amps and short-circuit protective device"

Auxiliary circuit according to UL/CSA

Type	T16	
Contact rating	N.C., 95-96	B600, Q300
	N.O., 97-98	D300, Q300
Conventional thermal current	N.C., 95-96	5 A
	N.O., 97-98	2.5 A

6

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device			
		480 / 600 V AC		480 / 600 V AC	
		Short circuit rating RMS symmetrical	Fuse type	Short circuit rating RMS symmetrical	Fuse type
T16-0.13	0.13 A	18 kA	1 A, K5	100 kA	30 A, Class J
T16-0.17	0.17 A	18 kA	1 A, K5	100 kA	30 A, Class J
T16-0.23	0.23 A	18 kA	1 A, K5	100 kA	30 A, Class J
T16-0.31	0.31 A	18 kA	3 A, K5	100 kA	30 A, Class J
T16-0.41	0.41 A	18 kA	3 A, K5	100 kA	30 A, Class J
T16-0.55	0.55 A	18 kA	3 A, K5	100 kA	30 A, Class J
T16-0.74	0.74 A	18 kA	3 A, K5	100 kA	30 A, Class J
T16-1.0	1.00 A	18 kA	6 A, K5	100 kA	30 A, Class J
T16-1.3	1.30 A	18 kA	6 A, K5	100 kA	30 A, Class J
T16-1.7	1.70 A	18 kA	6 A, K5	100 kA	30 A, Class J
T16-2.3	2.30 A	18 kA	10 A, K5	100 kA	30 A, Class J
T16-3.1	3.10 A	18 kA	10 A, K5	100 kA	30 A, Class J
T16-4.2	4.20 A	18 kA	15 A, K5	100 kA	30 A, Class J
T16-5.7	5.70 A	18 kA	20 A, K5	100 kA	30 A, Class J
T16-7.6	7.60 A	18 kA	25 A, K5	100 kA	30 A, Class J
T16-10	10.0 A	18 kA	35 A, K5	100 kA	45 A, Class J
T16-13	13.0 A	18 kA	40 A, K5	100 kA	45 A, Class J
T16-16	16.0 A	18 kA	60 A, K5	100 kA	45 A, Class J

T16 thermal overload relays



Technical data

General technical data

Type	T16	
Pollution degree	3	
Phase loss sensitive	Yes	
Ambient air temperature		
Operation	Open - compensated without derating	-25 ... +60 °C
	Open	-25 ... +60 °C
Storage	-50 ... +80 °C	
Ambient air temperature compensation	Continuous	
Maximum operating altitude permissible	2000 m	
Resistance to shock acc. to IEC 60068-2-27	25 g / 11 ms	
Resistance to vibrations acc. to IEC 60068-2-6	3 g / 3 ... 150 Hz	
Mounting position	Position 1-5	
Mounting	Mount on the contactor and tighten the screws of the main circuit terminals or with single mounting kit on DIN rail (35 mm)	
Degree of protection	IP20	





Electrical connection

Main circuit

Type	T16	
Connecting capacity		
	 Rigid	1 x 0.75 ... 4 mm ² 2 x 0.75 ... 1.5 mm ² or 1.5 ... 4 mm ² ¹⁾
	 Flexible	1 x or 2 x 0.75 ... 4 mm ²
	Stranded acc. to UL/CSA	1 x or 2 x AWG 18-10
	Flexible acc. to UL/CSA	1 x or 2 x AWG 18-10
Stripping length	12 mm	
Tightening torques	1.1 ... 1.5 Nm / 9 ... 13 lb.in	
Connection screw	M4 (Pozi driv 2)	

¹⁾ Combination of different wires not possible

Auxiliary circuit

Type	T16	
Connecting capacity		
	 Rigid	1 x or 2 x 0.75 ... 4 mm ²
	 Flexible with ferrule	1 x or 2 x 0.75 ... 2.5 mm ²
	 Flexible with insulated ferrule	1 x 0.75 ... 2.5 mm ² 2 x 0.75 ... 1.5 mm ²
	 Flexible	1 x or 2 x 0.75 ... 1 mm ² or 1 ... 2.5 mm ²
	Stranded acc. to UL/CSA	1 x or 2 x AWG 18-12
	Flexible acc. to UL/CSA	1 x or 2 x AWG 18-12
Stripping length	9 mm	
Tightening torques	1.1 ... 1.5 Nm / 9 ... 13 lb.in	
Connection screw	M3 (Pozi driv 2)	

TF42 thermal overload relays

Technical data


Main circuit – Utilization characteristics according to IEC/EN

Type	TF42
Standards	IEC/EN 60947-4-1, IEC/EN 60947-5-1, IEC/EN 60947-1
Rated operational voltage U_e	690 V AC
Rated frequency	50/60 Hz
Trip class	10
Number of poles	3
Duty time	100 %
Operating frequency without early tripping	Up to 15 operations/h, see "Technical diagram – Intermittent periodic duty"
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V AC

Auxiliary circuit according to IEC/EN

Type	TF42
Rated operational voltage U_e	600 V
Conventional free air thermal current I_{th}	N.C., 95-96 6 A N.O., 97-98 4 A
Rated frequency	DC, 50/60 Hz
Number of poles	1 N.O. + 1 N.C.
I_e / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category	
110-120 V	N.C., 95-96 3.00 A N.O., 97-98 0.75 A
220-230-240 V	N.C., 95-96 3.00 A N.O., 97-98 0.75 A
440 V	N.C., 95-96 0.75 A N.O., 97-98 0.75 A
480-500 V	N.C., 95-96 0.75 A N.O., 97-98 0.75 A
I_e / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category	
24 V	N.C., 95-96 1.25 A N.O., 97-98 1.25 A
110-120-125 V	N.C., 95-96 0.55 A N.O., 97-98 0.55 A
250 V	N.C., 95-96 0.27 A N.O., 97-98 0.27 A
Minimum switching capacity	17 V / 3 mA
Short-circuit protective device	N.C., 95-96 6 A, Fuse type gG N.O., 97-98 4 A, Fuse type gG
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V

Technical diagram – Intermittent periodic duty



t_s : Motor starting time

2CDC32000F0211

TF42 thermal overload relays

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	TF42
Standards	UL 508, CSA 22.2 No. 14
Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"
Short-circuit protective device	See table "Full load amps and short-circuit protective device"

Auxiliary circuit according to UL/CSA

Type	TF42
Contact rating	N.C., 95-96 B600, Q300 N.O., 97-98 D300, Q300
Conventional thermal current	N.C., 95-96 5 A N.O., 97-98 2.5 A

6

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device			
		480 / 600 V AC		480 / 600 V AC	
		Short circuit rating RMS symmetrical	Fuse type	Short circuit rating RMS symmetrical	Fuse type
TF42-0.13	0.13 A	18 kA	1 A, K5	100 kA	30 A, Class J
TF42-0.17	0.17 A	18 kA	1 A, K5	100 kA	30 A, Class J
TF42-0.23	0.23 A	18 kA	1 A, K5	100 kA	30 A, Class J
TF42-0.31	0.31 A	18 kA	3 A, K5	100 kA	30 A, Class J
TF42-0.41	0.41 A	18 kA	3 A, K5	100 kA	30 A, Class J
TF42-0.55	0.55 A	18 kA	3 A, K5	100 kA	30 A, Class J
TF42-0.74	0.74 A	18 kA	3 A, K5	100 kA	30 A, Class J
TF42-1.0	1.00 A	18 kA	6 A, K5	100 kA	30 A, Class J
TF42-1.3	1.30 A	18 kA	6 A, K5	100 kA	30 A, Class J
TF42-1.7	1.70 A	18 kA	6 A, K5	100 kA	30 A, Class J
TF42-2.3	2.30 A	18 kA	10 A, K5	100 kA	30 A, Class J
TF42-3.1	3.10 A	18 kA	10 A, K5	100 kA	30 A, Class J
TF42-4.2	4.20 A	18 kA	15 A, K5	100 kA	30 A, Class J
TF42-5.7	5.70 A	18 kA	20 A, K5	100 kA	30 A, Class J
TF42-7.6	7.60 A	18 kA	25 A, K5	100 kA	30 A, Class J
TF42-10	10.0 A	18 kA	35 A, K5	100 kA	45 A, Class J
TF42-13	13.0 A	18 kA	40 A, K5	100 kA	45 A, Class J
TF42-16	16.0 A	18 kA	60 A, K5	100 kA	45 A, Class J
TF42-20	20.0 A	18 kA	80 A, K5	100 kA	60 A, Class J
TF42-24	24.0 A	18 kA	80 A, K5	100 kA	60 A, Class J
TF42-29	29.0 A	18 kA	100 A, K5	100 kA	100 A, Class J
TF42-35	35.0 A	18 kA	150 A, K5	100 kA	175 A, Class J
TF42-38	38.0 A	18 kA	150 A, K5	100 kA	175 A, Class J

TF42 thermal overload relays



Technical data

General technical data

Type	TF42	
Pollution degree	3	
Phase loss sensitive	Yes	
Ambient air temperature		
Operation	Open - compensated without derating	-25 ... +60 °C
Storage	Open	-25 ... +60 °C
Storage		-50 ... +80 °C
Ambient air temperature compensation	Continuous	
Maximum operating altitude permissible	2000 m	
Resistance to shock acc. to IEC 60068-2-27	25 g / 11 ms	
Resistance to vibrations acc. to IEC 60068-2-6	3 g / 3 ... 150 Hz	
Mounting position	Position 1-5	
Mounting	Mount on the contactor and tighten the screws of the main circuit terminals or with single mounting kit on DIN rail (35 mm)	
Degree of protection	IP20	





Electrical connection

Main circuit

Type	TF42 (TF42-0.13 ... TF42-16)	TF42 (TF42-20 ... TF42-38)	
Connecting capacity			
 Rigid	1 x or 2 x	0.75 ... 4 mm ²	1.5 ... 2.5 mm ² or 2.5 ... 10 mm ² ¹⁾
 Flexible with insulated ferrule	1 x or 2 x	0.75 ... 4 mm ²	2.5 ... 4 mm ² or 4 ... 6 mm ²
Stranded acc. to UL/CSA	1 x or 2 x	AWG 18-10	AWG 14-6
Flexible acc. to UL/CSA	1 x or 2 x	AWG 18-10	AWG 14-6
Stripping length	12 mm		
Tightening torques	1.5 - 2.5 Nm / 13 ... 22 lb.in		2.5 - 2.7 Nm / 22 lb.in
Connection screw	M4 (Pozidriv 2)		

¹⁾ Combination of different wires not possible

Auxiliary circuit

Type	TF42	
Connecting capacity		
 Rigid	1 x or 2 x	0.75 ... 4 mm ²
 Flexible with ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible with insulated ferrule	1 x	0.75 ... 2.5 mm ²
	2 x	0.75 ... 1.5 mm ²
 Flexible	1 x or 2 x	0.75 ... 1 mm ² or 1 ... 2.5 mm ²
Stranded acc. to UL/CSA	1 x or 2 x	AWG 18-12
Flexible acc. to UL/CSA	1 x or 2 x	AWG 18-12
Stripping length	9 mm	
Tightening torques	1.1 ... 1.5 Nm / 9 ... 13 lb.in	
Connection screw	M3 (Pozidriv 2)	

TA25DU thermal overload relays

Technical data


Main circuit – Utilization characteristics according to IEC/EN

Type	TA25DU
Standards	IEC/EN 60947-4-1, IEC/EN 60947-5-1, IEC/EN 60947-1
Rated operational voltage U_e	690 V AC
Rated frequency	DC, 50/60 Hz
Frequency range	0 ... 400 Hz
Trip class	10A
Number of poles	3
Duty time	100 %
Operating frequency without early tripping	Up to 15 operations/h, see "Technical diagram – Intermittent periodic duty"
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V AC

Auxiliary circuit according to IEC/EN

Type	TA25DU
Rated operational voltage U_e	500 V AC, 440 V DC
Conventional free air thermal current I_{th}	N.C., 95-96 10 A N.O., 97-98 6 A
Rated frequency	DC, 50/60 Hz
Number of poles	1 N.O. + 1 N.C.
I_e / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category	
110-120 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
220-230-240 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
440 V	N.C., 95-96 1.90 A N.O., 97-98 1.00 A
480-500 V	N.C., 95-96 1.00 A N.O., 97-98 1.00 A
I_e / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category	
24 V	N.C., 95-96 1.25 A N.O., 97-98 1.25 A
60 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
110-120-125 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
250 V	N.C., 95-96 0.12 A N.O., 97-98 0.04 A
Minimum switching capacity	17 V / 3 mA
Short-circuit protective device	N.C., 95-96 10 A, Fuse type gG N.O., 97-98 6 A, Fuse type gG
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V

Technical diagram – Intermittent periodic duty



t_a : Motor starting time

2CDC232005F0211

TA25DU thermal overload relays

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	TA25DU
Standards	UL 508, CSA 22.2 No. 14
Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"
Short-circuit protective device	See table "Full load amps and short-circuit protective device"

Auxiliary circuit according to UL/CSA

Type	TA25DU
Contact rating	N.C., 95-96 C600 N.O., 97-98 B600
Conventional thermal current	5 A

6

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device 480 / 600 V AC			480 / 600 V AC		480 / 600 V AC	
		Short circuit rating RMS symmetrical	Fuse type	Listed circuit breaker	Short circuit rating RMS symmetrical	Listed circuit breaker	Short circuit rating RMS symmetrical	Fuse type
TA25DU-0.16	0.16 A	5 kA	1.0 A, K5 / RK5	15 A	35 / 18 kA	15 A	50 kA	30 A, Class J
TA25DU-0.25	0.25 A	5 kA	1.0 A, K5 / RK5	15 A	35 / 18 kA	15 A	50 kA	30 A, Class J
TA25DU-0.4	0.40 A	5 kA	3.0 A, K5 / RK5	15 A	35 / 18 kA	15 A	50 kA	30 A, Class J
TA25DU-0.63	0.63 A	5 kA	3.0 A, K5 / RK5	15 A	35 / 18 kA	15 A	50 kA	30 A, Class J
TA25DU-1.0	1.0 A	5 kA	6.0 A, K5 / RK5	15 A	35 / 18 kA	15 A	50 kA	30 A, Class J
TA25DU-1.4	1.4 A	5 kA	6.0 A, K5 / RK5	15 A	35 / 18 kA	15 A	50 kA	30 A, Class J
TA25DU-1.8	1.8 A	5 kA	6.0 A, K5 / RK5	15 A	35 / 18 kA	15 A	50 kA	30 A, Class J
TA25DU-2.4	2.4 A	5 kA	10 A, K5 / RK5	15 A	35 / 18 kA	15 A	50 kA	30 A, Class J
TA25DU-3.1	3.1 A	5 kA	10 A, K5 / RK5	15 A	35 / 18 kA	15 A	50 kA	30 A, Class J
TA25DU-4.0	4.0 A	5 kA	15 A, K5 / RK5	15 A	35 / 18 kA	15 A	50 kA	30 A, Class J
TA25DU-5.0	5.0 A	5 kA	20 A, K5 / RK5	20 A	35 / 18 kA	20 A	50 kA	30 A, Class J
TA25DU-6.5	6.5 A	5 kA	25 A, K5 / RK5	20 A	35 / 18 kA	20 A	50 kA	30 A, Class J
TA25DU-8.5	8.5 A	5 kA	35 A, K5 / RK5	20 A	35 / 18 kA	20 A	50 kA	30 A, Class J
TA25DU-11	11 A	5 kA	45 A, K5 / RK5	50 A	35 / 18 kA	50 A	50 kA	35 A, Class J
TA25DU-14	14 A	5 kA	60 A, K5 / RK5	50 A	35 / 18 kA	50 A	50 kA	60 A, Class J
TA25DU-19	19 A	5 kA	60 A, K5 / RK5	50 A	35 / 18 kA	50 A	50 kA	60 A, Class J
TA25DU-25	25 A	5 kA	70 A, K5 / RK5	70 A	35 / 18 kA	70 A	50 kA	100 A, Class J
TA25DU-32	32 A	5 kA	100 A, K5 / RK5	100 A	35 / 18 kA	100 A	50 kA	100 A, Class J

TA25DU thermal overload relays



Technical data

General technical data

Type	TA25DU		
Pollution degree	3		
Phase loss sensitive	Yes		
Ambient air temperature			
Operation	Open - compensated without derating	-25 ... +55 °C	
Storage	Open	-25 ... +55 °C	
Storage		-40 ... +70 °C	
Ambient air temperature compensation	Continuous		
Maximum operating altitude permissible	2000 m		
Resistance to shock acc. to IEC 60068-2-27	12 g / 15 ms		
Mounting position	Position 1-6		
Mounting	Mount on the contactor and tighten the screws of the main circuit terminals or with single mounting kit on DIN rail (35 mm)		
Degree of protection	IP20		



Electrical connection

Main circuit

Type		TA25DU (0.16-11 A)	TA25DU (14-25 A)	TA25DU (32 A)
Connecting capacity				
 Rigid	1 x	0.75 ... 4 mm ²	1.5 ... 6 mm ²	1.5 ... 10 mm ²
	2 x	0.75 ... 4 mm ²	1.5 ... 6 mm ²	-
 Flexible with insulated ferrule	1 x or 2 x ¹⁾	0.75 ... 4 mm ²	1.5 ... 4 mm ²	1.5 ... 6 mm ²
Stranded acc. to UL/CSA	1 x	AWG 16-8	AWG 16-8	AWG 10-8
	2 x	AWG 16-8	AWG 16-8	-
Flexible acc. to UL/CSA	1 x	AWG 16-8	AWG 16-8	AWG 10-8
	2 x	AWG 16-8	AWG 16-8	-
Stripping length		12 mm	12 mm	15 mm
Tightening torques		1.4 - 2.0 Nm / 12 lb.in	1.4 - 2.0 Nm / 12 lb.in	2.5 - 3.2 Nm / 20 lb.in
Connection screw		M4 (Pozidriv 2)	M4 (Pozidriv 2)	M5 (Pozidriv 2)

¹⁾ Combination of different wires not possible

Auxiliary circuit

Type		TA25DU
Connecting capacity		
 Rigid	1 x or 2 x	0.75 ... 4 mm ²
 Flexible	1 x or 2 x	0.75 ... 2.5 mm ²
Stranded acc. to UL/CSA	1 x or 2 x	AWG 18-14
Flexible acc. to UL/CSA	1 x or 2 x	AWG 18-14
Stripping length		9 mm
Tightening torques		0.8 ... 1.3 Nm / 12 lb.in
Connection screw		M3.5 (Pozidriv 2)

TA42DU thermal overload relays

Technical data


Main circuit – Utilization characteristics according to IEC/EN

Type	TA42DU
Standards	IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1
Rated operational voltage U_e	690 V AC
Rated frequency	DC, 50/60 Hz
Trip class	10A
Number of poles	3
Duty time	100 %
Operating frequency without early tripping	Up to 15 operations/h, see "Technical diagram – Intermittent periodic duty"
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V AC

Auxiliary circuit according to IEC/EN

Type	TA42DU
Rated operational voltage U_e	500 V AC, 440 V DC
Conventional free air thermal current I_{th}	N.C., 95-96 10 A N.O., 97-98 6 A
Rated frequency	DC, 50/60 Hz
Number of poles	1 N.O. + 1 N.C.
I_e / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category	
110-120 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
220-230-240 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
440 V	N.C., 95-96 1.90 A N.O., 97-98 1.00 A
480-500 V	N.C., 95-96 1.00 A N.O., 97-98 1.00 A
I_e / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category	
24 V	N.C., 95-96 1.25 A N.O., 97-98 1.25 A
60 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
110-120-125 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
250 V	N.C., 95-96 0.12 A N.O., 97-98 0.04 A
Minimum switching capacity	17 V / 3 mA
Short-circuit protective device	N.C., 95-96 10 A, Fuse type gG N.O., 97-98 6 A, Fuse type gG
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V

Technical diagram – Intermittent periodic duty



t_s : Motor starting time

TA42DU thermal overload relays

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	TA42DU
Standards	UL 508, CSA 22.2 No. 14
Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"
Short-circuit protective device	See table "Full load amps and short-circuit protective device"

Auxiliary circuit according to UL/CSA

Type	TA42DU
Contact rating	N.C., 95-96 C600 N.O., 97-98 B600
Conventional thermal current	5 A

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device						
		480 / 600 V AC		Listed circuit breaker		Listed circuit breaker		Fuse type
		Short circuit rating RMS symmetrical	Fuse type	Listed circuit breaker	Short circuit rating RMS symmetrical	Listed circuit breaker	Short circuit rating RMS symmetrical	Fuse type
TA42DU-25	25 A	5 kA	80 A, K5/ RK5	80 A	35 / 18 kA	80 A	50 kA	100 A, Class J
TA42DU-32	32 A	5 kA	100 A, K5/ RK5	80 A	35 / 18 kA	80 A	50 kA	100 A, Class J
TA42DU-42	42 A	5 kA	150 A, K5/ RK5	80 A	35 / 18 kA	80 A	50 kA	200 A, Class J

TA42DU thermal overload relays

Technical data



General technical data

Type	TA42DU	
Pollution degree	3	
Phase loss sensitive	Yes	
Ambient air temperature		
Operation	Open - compensated without derating	-25 ... +55 °C
	Open	-25 ... +55 °C
Storage	-40 ... +70 °C	
Ambient air temperature compensation	Continuous	
Maximum operating altitude permissible	2000 m	
Resistance to shock acc. to IEC 60068-2-27	12 g / 15 ms	
Mounting position	Position 1-6	
Mounting	Mount on the contactor and tighten the screws of the main circuit terminals or with single mounting kit on DIN rail (35 mm)	
Degree of protection	IP20	





Electrical connection

6

Main circuit

Type	TA42DU	
Connecting capacity		
 Rigid	1 x	2.5 ... 25 mm ²
	2 x	2.5 ... 16 mm ²
 Flexible with insulated ferrule	1 x	2.5 ... 25 mm ²
	2 x	2.5 ... 10 mm ²
	1 x or 2 x	AWG 8-1
Stranded acc. to UL/CSA	1 x or 2 x	AWG 8-1
Flexible acc. to UL/CSA	1 x or 2 x	AWG 8-1
Stripping length	14 mm	
Tightening torques	4.5 Nm / 40 lb.in	
Connection screw	M6 (Pozi driv 2)	

Auxiliary circuit

Type	TA42DU	
Connecting capacity		
 Rigid	1 x or 2 x	0.75 ... 4 mm ²
 Flexible with ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible with insulated ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible	1 x or 2 x	0.75 ... 2.5 mm ²
	1 x or 2 x	AWG 18-14
Stranded acc. to UL/CSA	1 x or 2 x	AWG 18-14
Flexible acc. to UL/CSA	1 x or 2 x	AWG 18-14
Stripping length	9 mm	
Tightening torques	0.8 ... 1.3 Nm / 12 lb.in	
Connection screw	M3.5 (Pozi driv 2)	

TA75DU thermal overload relays

Technical data


Main circuit – Utilization characteristics according to IEC/EN

Type	TA75DU
Standards	IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1
Rated operational voltage U_e	690 V AC
Rated frequency	DC, 50/60 Hz
Trip class	10A
Number of poles	3
Duty time	100 %
Operating frequency without early tripping	Up to 15 operations/h, see "Technical diagram – Intermittent periodic duty"
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V AC

Auxiliary circuit according to IEC/EN

Type	TA75DU
Rated operational voltage U_e	500 V AC, 440 V DC
Conventional free air thermal current I_{th}	N.C., 95-96 10 A N.O., 97-98 6 A
Rated frequency	DC, 50/60 Hz
Number of poles	1 N.O. + 1 N.C.
I_e / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category	
110-120 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
220-230-240 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
440 V	N.C., 95-96 1.90 A N.O., 97-98 1.00 A
480-500 V	N.C., 95-96 1.00 A N.O., 97-98 1.00 A
I_e / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category	
24 V	N.C., 95-96 1.25 A N.O., 97-98 1.25 A
60 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
110-120-125 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
250 V	N.C., 95-96 0.12 A N.O., 97-98 0.04 A
Minimum switching capacity	17 V / 3 mA
Short-circuit protective device	N.C., 95-96 10 A, Fuse type gG N.O., 97-98 6 A, Fuse type gG
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V

Technical diagram – Intermittent periodic duty



t_s : Motor starting time

2CDC232005R0211

TA75DU thermal overload relays

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	TA75DU
Standards	UL 508, CSA 22.2 No. 14
Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"
Short-circuit protective device	See table "Full load amps and short-circuit protective device"

Auxiliary circuit according to UL/CSA

Type	TA75DU
Contact rating	N.C., 95-96 C600 N.O., 97-98 B600
Conventional thermal current	5 A

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device		
		480 / 600 V AC	Fuse type	Listed circuit breaker
TA75DU-25	25 A	5 kA	80 A, K5 / RK5	80 A
TA75DU-32	32 A	5 kA	100 A, K5 / RK5	80 A
TA75DU-42	42 A	5 kA	150 A, K5 / RK5	80 A
TA75DU-52	52 A	5 kA	175 A, K5 / RK5	125 A
TA75DU-63	63 A	10 kA	200 A, K5 / RK5	125 A
TA75DU-80	80 A	10 kA	250 A, K5 / RK5	125 A

TA75DU thermal overload relays

Technical data



General technical data

Type	TA75DU	
Pollution degree	3	
Phase loss sensitive	Yes	
Ambient air temperature		
Operation	Open - compensated without derating	-25 ... +55 °C
	Open	-25 ... +55 °C
Storage	-40 ... +70 °C	
Ambient air temperature compensation	Continuous	
Maximum operating altitude permissible	2000 m	
Resistance to shock acc. to IEC 60068-2-27	12 g / 15 ms	
Mounting position	Position 1-6	
Mounting	Mount on the contactor and tighten the screws of the main circuit terminals or with single mounting kit on DIN rail (35 mm)	
Degree of protection	IP20	





Electrical connection

6

Main circuit

Type	TA75DU	
Connecting capacity		
 Rigid	1 x	2.5 ... 25 mm ²
	2 x	2.5 ... 16 mm ²
 Flexible with insulated ferrule	1 x	2.5 ... 25 mm ²
	2 x	2.5 ... 10 mm ²
	1 x or 2 x	AWG 8-1
Stranded acc. to UL/CSA	1 x or 2 x	AWG 8-1
Flexible acc. to UL/CSA	1 x or 2 x	AWG 8-1
Stripping length	14 mm	
Tightening torques	4.5 Nm / 40 lb.in	
Connection screw	M6 (Pozi driv 2)	

Auxiliary circuit

Type	TA75DU	
Connecting capacity		
 Rigid	1 x or 2 x	0.75 ... 4 mm ²
 Flexible with ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible with insulated ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible	1 x or 2 x	0.75 ... 2.5 mm ²
	1 x or 2 x	AWG 18-14
Stranded acc. to UL/CSA	1 x or 2 x	AWG 18-14
Flexible acc. to UL/CSA	1 x or 2 x	AWG 18-14
Stripping length	9 mm	
Tightening torques	0.8 ... 1.3 Nm / 12 lb.in	
Connection screw	M3.5 (Pozi driv 2)	

TA80DU thermal overload relays

Technical data


Main circuit – Utilization characteristics according to IEC/EN

Type	TA80DU
Standards	IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1
Rated operational voltage U_e	690 V AC
Rated frequency	DC, 50/60 Hz
Frequency range	0 ... 400 Hz
Trip class	10A
Number of poles	3
Duty time	100 %
Operating frequency without early tripping	Up to 15 operations/h, see "Technical diagram – Intermittent periodic duty"
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V AC

Auxiliary circuit according to IEC/EN

Type	TA80DU
Rated operational voltage U_e	500 V AC, 440 V DC
Conventional free air thermal current I_m	N.C., 95-96 10 A N.O., 97-98 6 A
Rated frequency	DC, 50/60 Hz
Number of poles	1 N.O. + 1 N.C.
I_e / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category	
110-120 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
220-230-240 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
440 V	N.C., 95-96 1.90 A N.O., 97-98 1.00 A
480-500 V	N.C., 95-96 1.00 A N.O., 97-98 1.00 A
I_e / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category	
24 V	N.C., 95-96 1.25 A N.O., 97-98 1.25 A
60 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
110-120-125 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
250 V	N.C., 95-96 0.12 A N.O., 97-98 0.04 A
Minimum switching capacity	17 V / 3 mA
Short-circuit protective device	N.C., 95-96 10 A, Fuse type gG N.O., 97-98 6 A, Fuse type gG
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V

Technical diagram – Intermittent periodic duty



t_s : Motor starting time

TA80DU thermal overload relays

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	TA80DU
Standards	UL 508, CSA 22.2 No. 14
Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"
Short-circuit protective device	See table "Full load amps and short-circuit protective device"

Auxiliary circuit according to UL/CSA

Type	TA80DU
Contact rating	N.C., 95-96 C600 N.O., 97-98 B600
Conventional thermal current	5 A

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device		
		480 / 600 V AC Short circuit rating RMS symmetrical	Fuse type	Listed circuit breaker
TA80DU-42	42 A	5 kA	150 A, K5 / RK5	80 A
TA80DU-52	52 A	5 kA	175 A, K5 / RK5	125 A
TA80DU-63	63 A	10 kA	200 A, K5 / RK5	125 A
TA80DU-80	80 A	10 kA	250 A, K5 / RK5	125 A

TA80DU thermal overload relays

Technical data



General technical data

Type	TA80DU	
Pollution degree	3	
Phase loss sensitive	Yes	
Ambient air temperature		
Operation	Open - compensated without derating	-25 ... +55 °C
	Open	-25 ... +55 °C
Storage	-40 ... +70 °C	
Ambient air temperature compensation	Continuous	
Maximum operating altitude permissible	2000 m	
Resistance to shock acc. to IEC 60068-2-27	12 g / 15 ms	
Mounting position	Position 1-6	
Mounting	Mount on the contactor and tighten the screws of the main circuit terminals or with single mounting kit on DIN rail (35 mm)	
Degree of protection	IP20	





Electrical connection

6

Main circuit

Type	TA80DU	
Connecting capacity		
 Rigid	1 x	2.5 ... 25 mm ²
	2 x	2.5 ... 16 mm ²
 Flexible with insulated ferrule	1 x	2.5 ... 25 mm ²
	2 x	2.5 ... 10 mm ²
	1 x or 2 x	AWG 8-1
Stranded acc. to UL/CSA	1 x or 2 x	AWG 8-1
Flexible acc. to UL/CSA	1 x or 2 x	AWG 8-1
Stripping length	14 mm	
Tightening torques	4.5 Nm / 40 lb.in	
Connection screw	M6 (Pozi driv 2)	

Auxiliary circuit

Type	TA80DU	
Connecting capacity		
 Rigid	1 x or 2 x	0.75 ... 4 mm ²
 Flexible with ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible with insulated ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible	1 x or 2 x	0.75 ... 2.5 mm ²
	1 x or 2 x	AWG 18-14
Stranded acc. to UL/CSA	1 x or 2 x	AWG 18-14
Flexible acc. to UL/CSA	1 x or 2 x	AWG 18-14
Stripping length	9 mm	
Tightening torques	0.8 ... 1.3 Nm / 12 lb.in	
Connection screw	M3.5 (Pozi driv 2)	

TA110DU thermal overload relays

66 ... 110 A



TA110DU-110

2CDC31009F0011

Description

The TA110DU thermal overload relays are economic electromechanical protection devices for the main circuit. They offer reliable protection for motors in the event of overload or phase failure. The devices have trip class 10A.

The thermal overload relays are three pole relays with bimetal tripping elements. The motor current flows through the bimetal tripping elements and heats them directly and indirectly. In case of an overload (over current), the bimetal elements bent as a result of the heating. This leads to a release of the relay and a change of the contacts switching position (95-96 / 97-98).

- Manual or automatic reset selectable
- Phase loss sensitive acc. to IEC/EN 60947-4-1
- Two electrically isolated auxiliary contacts – 1 N.O. + 1 N.C.
- TEST and STOP function – Trip indication on the front
- Temperature compensation
- Suitable for three- and single-phase applications


Ordering details

Setting range	Short-circuit protective device	Trip class	Type	Order code	Weight (1 pce) kg
A					
66 ... 90	200 A, Fuse type gG / 160 A aM	10A	TA110DU-90	1SAZ411201R1001	0.750
80 ... 110	224 A, Fuse type gG / 200 A aM	10A	TA110DU-110	1SAZ411201R1002	0.755

Ordering details accessories

For thermal overload relays	Description	Type	Order code	Weight (1 pce) kg
TA110DU	Single mounting kit	DB200	1SAZ401110R0001	0.225

Main dimensions mm, inches

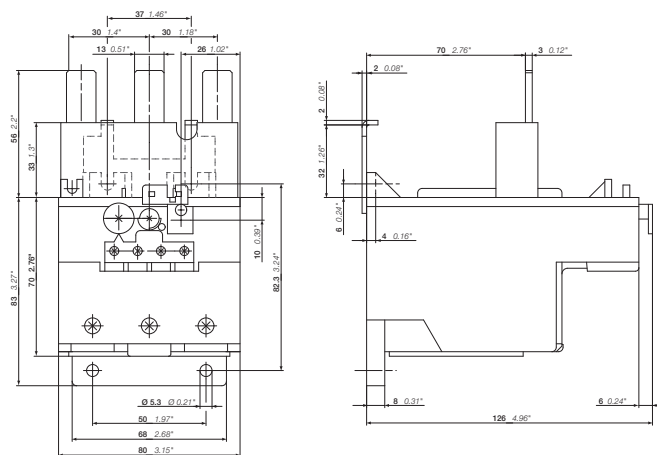

TA110DU

2CDC31009F0011

2CDC106037C0201

TA110DU thermal overload relays

Technical data


Main circuit – Utilization characteristics according to IEC/EN

Type	TA110DU
Standards	IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1
Rated operational voltage U_e	690 V AC
Rated frequency	DC, 50/60 Hz
Frequency range	0 ... 400 Hz
Trip class	10A
Number of poles	3
Duty time	100 %
Operating frequency without early tripping	Up to 15 operations/h, see "Technical diagram – Intermittent periodic duty"
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V AC

Auxiliary circuit according to IEC/EN

Type	TA110DU
Rated operational voltage U_e	500 V AC, 440 V DC
Conventional free air thermal current I_m	N.C., 95-96 10 A N.O., 97-98 6 A
Rated frequency	DC, 50/60 Hz
Number of poles	1 N.O. + 1 N.C.
I_e / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category	
110-120 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
220-230-240 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
440 V	N.C., 95-96 1.90 A N.O., 97-98 1.00 A
480-500 V	N.C., 95-96 1.00 A N.O., 97-98 1.00 A
I_e / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category	
24 V	N.C., 95-96 1.25 A N.O., 97-98 1.25 A
60 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
110-120-125 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
250 V	N.C., 95-96 0.12 A N.O., 97-98 0.04 A
Minimum switching capacity	17 V / 3 mA
Short-circuit protective device	N.C., 95-96 10 A, Fuse type gG N.O., 97-98 6 A, Fuse type gG
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V

Technical diagram – Intermittent periodic duty



t_s : Motor starting time

TA110DU thermal overload relays

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	TA110DU
Standards	UL 508, CSA 22.2 No. 14
Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"
Short-circuit protective device	See table "Full load amps and short-circuit protective device"

Auxiliary circuit according to UL/CSA

Type	TA110DU
Contact rating	N.C., 95-96 C600 N.O., 97-98 B600
Conventional thermal current	5 A

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device						
		480 / 600 V AC		Listed circuit breaker		Fused		Listed circuit breaker
		Short circuit rating RMS symmetrical	Fuse type	Short circuit rating RMS symmetrical	Fuse type	Short circuit rating RMS symmetrical	Fuse type	
TA110DU-90	90 A	10 kA	250 A, K5 / RK5	150 A	65 kA	200 A, Class J	65 / 25 kA	150 A
TA110DU-110	110 A	10 kA	250 A, K5 / RK5	250 A	65 kA	200 A, Class J	65 / 25 kA	150 A

TA110DU thermal overload relays

Technical data



General technical data

Type	TA110DU	
Pollution degree	3	
Phase loss sensitive	Yes	
Ambient air temperature		
Operation	Open - compensated without derating	-25 ... +55 °C
	Open	-25 ... +55 °C
Storage	-40 ... +70 °C	
Ambient air temperature compensation	Continuous	
Maximum operating altitude permissible	2000 m	
Resistance to shock acc. to IEC 60068-2-27	12 g / 15 ms	
Mounting position	Position 1-6	
Mounting	Mount on the contactor and tighten the screws of the main circuit terminals or with single mounting kit	
Degree of protection	IP20	





Electrical connection

6

Main circuit


Type	TA110DU	
Connecting capacity		
 Rigid	1 x	16 ... 35 mm ²
	2 x	-
 Flexible	1 x	16 ... 35 mm ²
	2 x	-
	1 x or 2 x	AWG 6-2/0
Stranded acc. to UL/CSA	1 x or 2 x	AWG 6-2/0
Flexible acc. to UL/CSA	1 x or 2 x	AWG 6-2/0
Stripping length	25 mm	
Tightening torques	7.2 ... 9.6 Nm / 40 lb.in	
Connection screw	M8 (Hexagon)	

Auxiliary circuit

Type	TA110DU	
Connecting capacity		
 Rigid	1 x or 2 x	0.75 ... 4 mm ²
 Flexible with ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible with insulated ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible	1 x or 2 x	0.75 ... 2.5 mm ²
	1 x or 2 x	AWG 18-14
Stranded acc. to UL/CSA	1 x or 2 x	AWG 18-14
Flexible acc. to UL/CSA	1 x or 2 x	AWG 18-14
Stripping length	9 mm	
Tightening torques	0.8 ... 1.3 Nm / 12 lb.in	
Connection screw	M3.5 (Poqidriv 2)	

TA200DU thermal overload relays

66 ... 200 A



2CDC231010F0011

TA200DU-200

Description

The TA200DU thermal overload relays are economic electromechanical protection devices for the main circuit. They offer reliable protection for motors in the event of overload or phase failure. The devices have trip class 10A.

The thermal overload relays are three pole relays with bimetal tripping elements. The motor current flows through the bimetal tripping elements and heats them directly and indirectly. In case of an overload (over current), the bimetal elements bent as a result of the heating. This leads to a release of the relay and a change of the contacts switching position (95-96 / 97-98).

- Manual or automatic reset selectable
- Phase loss sensitive acc. to IEC/EN 60947-4-1
- Two electrically isolated auxiliary contacts – 1 N.O. + 1 N.C.
- TEST and STOP function – Trip indication on the front
- Temperature compensation
- Suitable for three- and single-phase applications


Ordering details

Setting range	Short-circuit protective device	Trip class	Type	Order code	Weight (1 pce) kg
A					
66 ... 90	200 A, Fuse type gG / 160 A aM	10A	TA200DU-90	1SAZ421201R1001	0.755
80 ... 110	224 A, Fuse type gG / 200 A aM	10A	TA200DU-110	1SAZ421201R1002	0.760
100 ... 135	224 A, Fuse type gG / 200 A aM	10A	TA200DU-135	1SAZ421201R1003	0.760
110 ... 150	250 A, Fuse type gG / 224 A aM	10A	TA200DU-150	1SAZ421201R1004	0.760
130 ... 175	315 A, Fuse type gG / 250 A aM	10A	TA200DU-175	1SAZ421201R1005	0.770
150 ... 200	315 A, Fuse type gG / 250 A aM	10A	TA200DU-200	1SAZ421201R1006	0.785

Ordering details accessories

For thermal overload relays	Description	Type	Order code	Weight (1 pce) kg
TA200DU	Terminal shroud	LT200/A	1SAZ401901R1001	0.090
TA200DU	Single mounting kit	DB200	1SAZ401110R0001	0.225

Main dimensions mm, inches

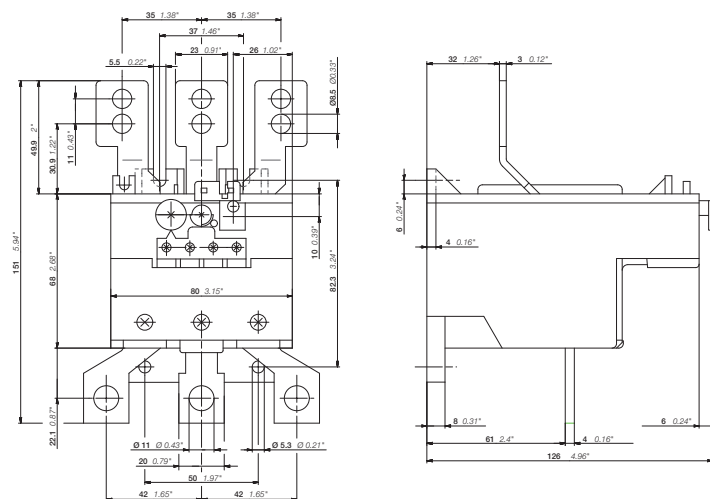

TA200DU

2CDC232021F0011

2CDC106038C0201

TA200DU thermal overload relays

Technical data


Main circuit – Utilization characteristics according to IEC/EN

Type	TA200DU
Standards	IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1
Rated operational voltage U_e	690 V AC
Rated frequency	DC, 50/60 Hz
Frequency range	0 ... 400 Hz
Trip class	10A
Number of poles	3
Duty time	100 %
Operating frequency without early tripping	Up to 15 operations/h, see "Technical diagram – Intermittent periodic duty"
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V AC

Auxiliary circuit according to IEC/EN

Type	TA200DU
Rated operational voltage U_e	500 V AC, 440 V DC
Conventional free air thermal current I_{th}	N.C., 95-96 10 A N.O., 97-98 6 A
Rated frequency	DC, 50/60 Hz
Number of poles	1 N.O. + 1 N.C.
I_e / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category	
110-120 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
220-230-240 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
440 V	N.C., 95-96 1.90 A N.O., 97-98 1.00 A
480-500 V	N.C., 95-96 1.00 A N.O., 97-98 1.00 A
I_e / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category	
24 V	N.C., 95-96 1.25 A N.O., 97-98 1.25 A
60 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
110-120-125 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
250 V	N.C., 95-96 0.12 A N.O., 97-98 0.04 A
Minimum switching capacity	17 V / 3 mA
Short-circuit protective device	N.C., 95-96 10 A, Fuse type gG N.O., 97-98 6 A, Fuse type gG
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V

Technical diagram – Intermittent periodic duty



t_s : Motor starting time

2CDC32005F0211

2CDC106038C0201

TA200DU thermal overload relays

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	TA200DU
Standards	UL 508, CSA 22.2 No. 14
Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"
Short-circuit protective device	See table "Full load amps and short-circuit protective device"

Auxiliary circuit according to UL/CSA

Type	TA200DU
Contact rating	N.C., 95-96 C600 N.O., 97-98 B600
Conventional thermal current	5 A

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device							
		480 / 600 V AC		Listed circuit breaker		Fuse type		Listed circuit breaker	
		Short circuit rating RMS symmetrical	Fuse type	Listed circuit breaker	Short circuit rating RMS symmetrical	Fuse type	Short circuit rating RMS symmetrical	Listed circuit breaker	
TA200DU-90	90 A	10 kA	250 A, K5 / RK5	225 A	-	-	-	-	
TA200DU-110	110 A	10 kA	250 A, K5 / RK5	225 A	-	-	18 kA	125 A	
TA200DU-135	135 A	10 kA	300 A, K5 / RK5	225 A	50 kA	400 A, Class J	35 / 18 kA	225 A	
TA200DU-150	150 A	10 kA	300 A, K5 / RK5	225 A	65 kA	400 A, Class J	35 / 18 kA	225 A	
TA200DU-175	175 A	10 kA	300 A, K5 / RK5	225 A	65 kA	400 A, Class J	35 / 18 kA	225 A	
TA200DU-200	200 A	10 kA	400 A, K5 / RK5	400 A	65 kA	400 A, Class J	35 / 18 kA	225 A	

TA200DU thermal overload relays

Technical data




General technical data

Type	TA200DU	
Pollution degree	3	
Phase loss sensitive	Yes	
Ambient air temperature		
Operation	Open - compensated without derating	-25 ... +55 °C
	Open	-25 ... +55 °C
Storage	-40 ... +70 °C	
Ambient air temperature compensation	Continuous	
Maximum operating altitude permissible	2000 m	
Resistance to shock acc. to IEC 60068-2-27	12 g / 15 ms	
Mounting position	Position 1-6	
Mounting	Mount on the contactor and tighten the screws of the main circuit terminals or with single mounting kit	
Degree of protection	IP20	





Electrical connection

6

Main circuit

Type	TA200DU	
Connecting capacity		
 Rigid	1 x	25 ... 120 mm ²
 Flexible	1 x	16 ... 35 mm ²
 Lugs	L ≤ 12 mm / l > 6 mm	
Tightening torques	4 Nm	
Connection screw	M6	

Auxiliary circuit

Type	TA200DU	
Connecting capacity		
 Rigid	1 x or 2 x	0.75 ... 4 mm ²
 Flexible with ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible with insulated ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible	1 x or 2 x	0.75 ... 2.5 mm ²
Stranded acc. to UL/CSA	1 x or 2 x	AWG 18-14
Flexible acc. to UL/CSA	1 x or 2 x	AWG 18-14
Stripping length	9 mm	
Tightening torques	0.8 ... 1.3 Nm / 12 lb.in	
Connection screw	M3.5 (Pozidriv 2)	

TA450DU thermal overload relays

Technical data


Main circuit – Utilization characteristics according to IEC/EN

Type	TA450DU
Standards	IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1
Rated operational voltage U_e	1000 V AC
Rated frequency	50/60 Hz
Trip class	10A
Number of poles	3
Duty time	100 %
Operating frequency without early tripping	Up to 15 operations/h, see "Technical diagram – Intermittent periodic duty"
Rated impulse withstand voltage U_{imp}	8 kV
Rated insulation voltage U_i	1000 V AC

Auxiliary circuit according to IEC/EN

Type	TA450DU
Rated operational voltage U_e	500 V AC, 440 V DC
Conventional free air thermal current I_{th}	N.C., 95-96 10 A N.O., 97-98 6 A
Rated frequency	DC, 50/60 Hz
Number of poles	1 N.O. + 1 N.C.
I_e / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category	
110-120 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
220-230-240 V	N.C., 95-96 3.00 A N.O., 97-98 3.00 A
440 V	N.C., 95-96 1.90 A N.O., 97-98 1.00 A
480-500 V	N.C., 95-96 1.00 A N.O., 97-98 1.00 A
I_e / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category	
24 V	N.C., 95-96 1.25 A N.O., 97-98 1.25 A
60 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
110-120-125 V	N.C., 95-96 0.25 A N.O., 97-98 0.25 A
250 V	N.C., 95-96 0.12 A N.O., 97-98 0.04 A
Minimum switching capacity	17 V / 3 mA
Short-circuit protective device	N.C., 95-96 10 A, Fuse type gG N.O., 97-98 6 A, Fuse type gG
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	500 V

Technical diagram – Intermittent periodic duty



t_s : Motor starting time

2CDC232005R0211

TA450DU thermal overload relays

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	TA450DU
Standards	UL 508, CSA 22.2 No. 14
Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"
Short-circuit protective device	See table "Full load amps and short-circuit protective device"

Auxiliary circuit according to UL/CSA

Type	TA450DU
Contact rating	N.C., 95-96 C600 N.O., 97-98 B600
Conventional thermal current	5 A

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device		
		480 / 600 V AC Short circuit rating RMS symmetrical	Fuse type	Listed circuit breaker
TA450DU-185	185 A	10 kA	na	na
TA450DU-235	235 A	10 kA	na	na
TA450DU-310	310 A	18 kA	na	na

TA450DU thermal overload relays

Technical data

General technical data





Type	TA450DU	
Pollution degree	3	
Phase loss sensitive	Yes	
Ambient air temperature		
Operation	Open - compensated without derating	-25 ... +55 °C
	Open	-25 ... +55 °C
Storage	-40 ... +70 °C	
Ambient air temperature compensation	Continuous	
Maximum operating altitude permissible	2000 m	
Resistance to shock acc. to IEC 60068-2-27	12 g / 15 ms	
Mounting position	Position 1-6	
Degree of protection	IP20	

Electrical connection

Main circuit

Type	TA450DU	
Connecting capacity		
	Bar	Max. 21 x 28.4 mm

Auxiliary circuit

Type	TA450DU	
Connecting capacity		
 Rigid	1 x or 2 x	0.75 ... 4 mm ²
 Flexible with ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible with insulated ferrule	1 x or 2 x	0.75 ... 2.5 mm ²
 Flexible	1 x or 2 x	0.75 ... 2.5 mm ²
	Stranded acc. to UL/CSA	1 x or 2 x AWG 18-14
	Flexible acc. to UL/CSA	1 x or 2 x AWG 18-14
Stripping length	9 mm	
Tightening torques	0.8 ... 1.3 Nm / 12 lb.in	
Connection screw	M3.5 (Pozidriv 2)	